



[Zoom in Picture](#)

■ Features

- 12.1" LC Display
- 800 x 600 Pixels
- Brightness 300 cd

VS open frame 12.1" LC Display

Quick Link: | [Features](#) | [Specification](#) | [LCD](#) | [Environmental](#) | [Touchscreen optional](#) | [Power consumption](#) | [Ordering Information](#) |

Construction

Heavy duty steel chassis with VESA 75/100mm standard screw holes

Display

- Flat Panel 12.1" color TFT, 800 x 600
- Brightness 300cd
- optional Touch screen

[>Back to top](#)

■ Specification

Input signal

VGA, AV-in optional

Control

on rear panel

Power supply

external 48W DC 12V power adapter

OS Support

MS DOS, Windows 98/SE, WIN NT4.0, W2K, XP

Response Time

20ms Rising, 35ms Decay

Viewing Angel

55° up to 60° L/R, 35° up to 55° U/D

Signal Connector

15-pin mini DSUB

Function Control

Brightness, Contrast, H/V Position, Color, Phase, Clock

[>Back to top](#)

■ LCD

Consumption

low driving voltage and low power consumption

Display type

12.1"

Light luminance

300cd

max Resolution

800 x 600

max Colors

16M colors

Response Time

20ms Rising, 35ms Decay

Backlight

CCFL, Horizontal lamp type

Pixel Pitch

0.3075x0.3075mm

Contrast Ratio

200/1

[>Back to top](#)

■ Environmental

Operating Temp	0°C to 45°C
Storage Temp	, -20°C to 60°C
Vibration	10-150Hz, 0.15mm
Shock	30G peak acceleration, 11ms. duration

[>Back to top](#)

■ Touchscreen optional

Type	analog resistive
Resolution	continuous
Light transmission	79% or more
Controller	RS232 interface

[>Back to top](#)

■ Power consumption

Software Driver	support Win 98, NT, 2000, ME, XP
Lifetime	100 million times
Dimension	350.1 x 264.1 x 50mm
Weight	ca. 4,5kg
Certification	CE


[>Back to top](#)

■ Ordering Information

Art.No	3110
Product Name	VS OPM-12 LC Display
Packing list	Open frame Displays includes LCD Panel, external Power Adapter, Power Cord
Versions:	OPM 12T with Touchscreen

[>Back to top](#)

■ Full size product image

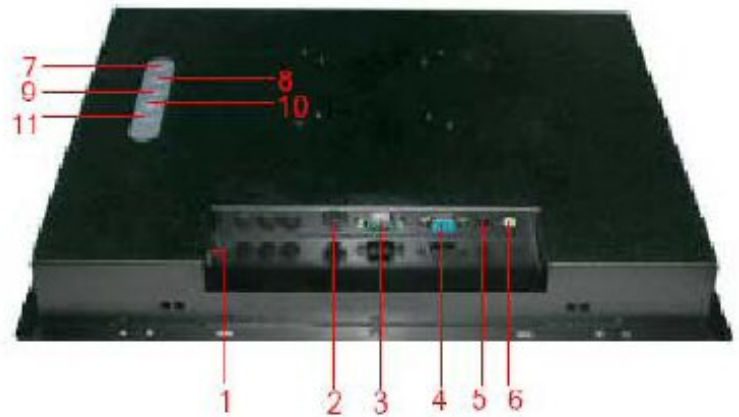

- | | |
|----------------|----------------|
| 1•Power switch | 7•Power Switch |
| 2•USB Touch-In | 8• Menu |
| 3•Com Touch-In | 9•SEL |
| 4•VGA | 10•SEL |
| 5•DC•12•in | 11•Enter |
| 6•VGA•Audio•In | |